


Tubo Pro Pendant

22W / 1875lm / 3000K / DALI / Wide flood
76° / 1256mm

64917

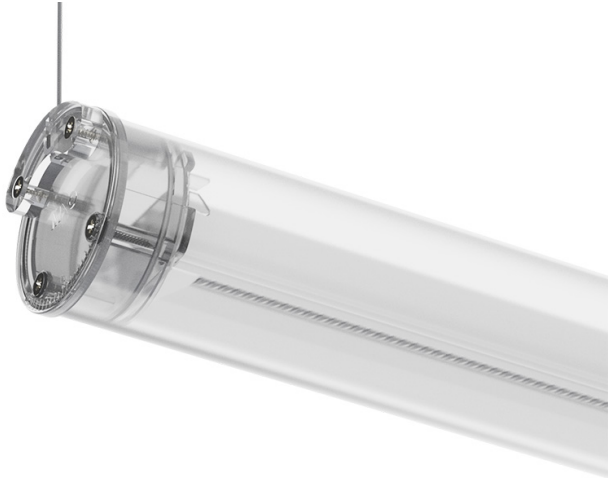

Design: Eduardo Souto de Moura
Pendant luminaire with tubular semi frosted PMMA body with 70mm diameter.
Clear polycarbonate end caps with marked installation angles.
Linear lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.
Equipped with 2m cable (5x0.75 mm²).
Fitting accessories ordered separately.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP44 | 230Vac | 50/60Hz



| LED | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 22W | 25,9W |
| Flux | | 2760lm | 1875lm |
| Efficiency | | 130lm/W | 73lm/W |
| LOR | | - | 68% |
| UGR | | - | <16 |



Beam angle
Wide flood 76°

Application

Weight



Finishes

○ .01 White / RAL 9010

Mandatory

59146 Pendant fitting accessory

Data according to regulations
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class E
Model Identifier 2053560160

