

2,1W / 90lm / 3000K / On/Off / Spot 17° /  
31mm

65039



Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.

Special springs available on request.


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power		2,1W	2,7W
Flux		200lm	90lm
Efficiency		95lm/W	33lm/W
LOR		-	45%
UGR		-	<10

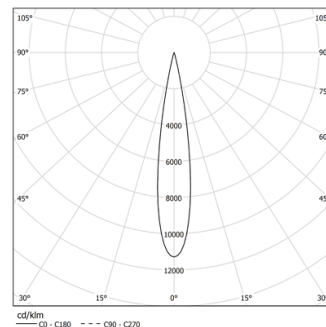

Beam angle  
Spot 17°


Application



Weight  
0,15Kg



26x26

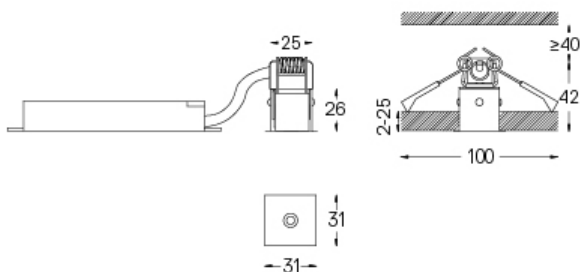

Finishes

○ .01 White / RAL 9010

● .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com