


Image not found or type unknown

	4000K	Light Source	Luminaire
Power	1,1W		1,4W
Flux	120lm		90lm
Efficiency	109lm/W		64lm/W
LOR	-		75%
UGR	-		-


Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

Accurate reflector for a defined and controlled beam of light, achieving maximum efficiency.

Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

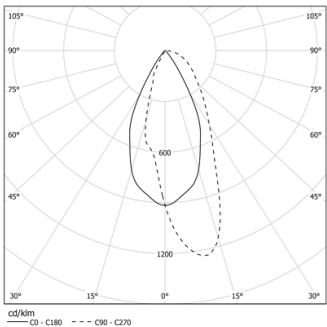

Beam angle  
WallWasher


Application



Weight  
0,15Kg



26x26

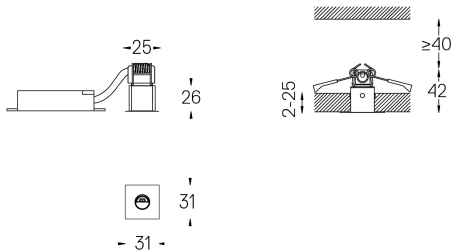

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com