

Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.


Special springs available on request.


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



 LED	4000K	Light Source	Luminaire
Power	51W	59,3W	
Flux	5280lm	2325lm	
Efficiency	105lm/W	39lm/W	
LOR	-	44%	
UGR	-	<10	



Beam angle
Spot 17°


Application



Weight
0,6Kg



26x1194

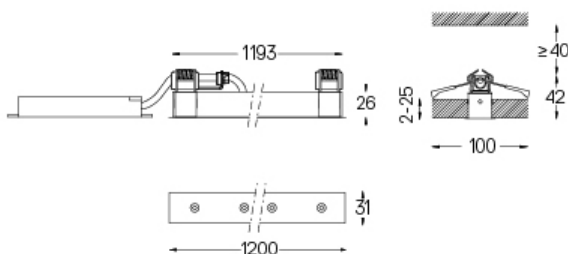

Finishes

- ☐ .01 White / RAL 9010
☒ .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com