

Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.


Special springs available on request.


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



|   |       |              |           |
|---|-------|--------------|-----------|
|  LED | 4000K | Light Source | Luminaire |
| Power   |       | 26W          | 30,7W     |
| Flux  |       | 2640lm       | 1160lm    |
| Efficiency  |       | 105lm/W      | 38lm/W    |
| LOR   |       | -            | 44%       |
| UGR   |       | -            | <10       |

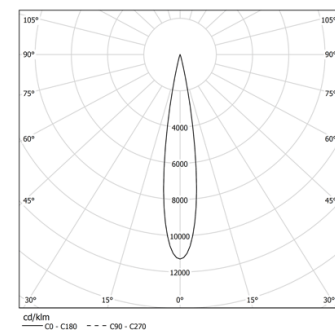

Beam angle  
**Spot 17°**


## Application



Weight  
0,5Kg



26x594

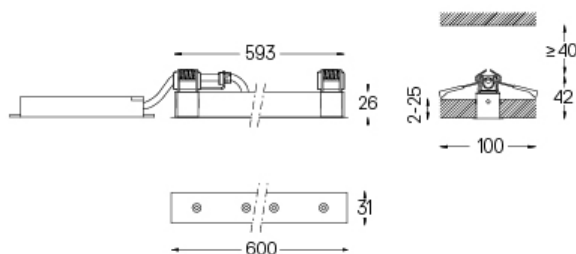

## Finishes

☐ .01 White / RAL 9010

● .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)