


51W / 4325lm / 4000K / DALI / WallWasher /  
1200mm

65125

Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.  
Accurate reflector for a defined and controlled beam of light, achieving maximum efficiency.  
Special springs available on request.



LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		51W	59,3W
Flux		5690lm	4325lm
Efficiency		113lm/W	73lm/W
LOR		-	76%
UGR		-	-



Beam angle  
WallWasher


Application



Weight  
0,6Kg



26x1194

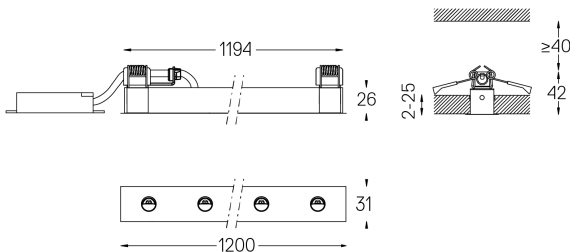

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com