

26W / 1130lm / 3000K / On/Off / Spot 17° /  
 1211mm

**65362**


Design: O/M + Bartenbach GmbH

Surface or pendant luminaire with housing made of aluminium with electrostatic 100% polyester paint with textured finish.

Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured-finish.

Housing and perforated cover plate made of aluminium with textured-paint finish. With the latest Bartenbach GmbH technology, inVision35 is a discreet solution, that can use great light distribution and visual comfort from a nearly invisible source.

Fitting accessories for pendant version ordered separately.


LED CRI&gt;90 / &gt;50.000h, L80/B10 / 2-step MacAdam

Power supply included.

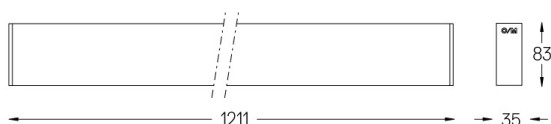
IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power		26W	30,7W
Flux		2570lm	1130lm
Efficiency		102lm/W	37lm/W
LOR		-	44%
UGR		-	<10


 Beam angle  
**Spot 17°**

Application


 Weight  
**2,4Kg**


Finishes

○ .01 White / RAL 9010

● .02 Black / RAL 9005

Mandatory

**54036** Pendant direct fitting accessory

**54034** Clear Base

ø60x35mm