

51W / 2325lm / 4000K / DALI / Spot 17° /  
1200mm

65471



## Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

## Modules

- A inVision Module

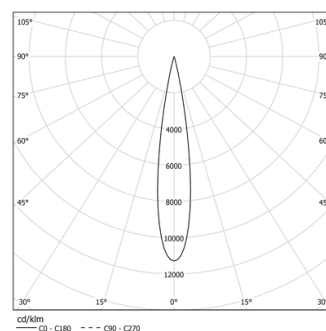
Design: O/M + Bartenbach GmbH

inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.

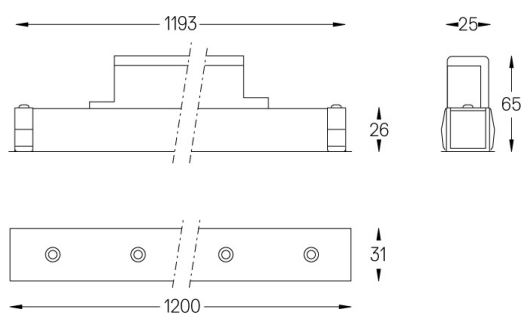
LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 51W          | 59,3W     |
| Flux       |       | 5280lm       | 2325lm    |
| Efficiency |       | 105lm/W      | 39lm/W    |
| LOR        |       | -            | 44%       |
| UGR        |       | -            | <10       |

Beam angle  
Spot 17°

## Application

Weight  
0,8Kg

## Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com