

26W / 1250lm / 4000K / On/Off / Spot 17° / 1200mm

65674



Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Modules

A inVision Module

Design: O/M + Bartenbach GmbH
inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



| LED | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 26W | 30,7W |
| Flux | | 2845lm | 1250lm |
| Efficiency | | 113lm/W | 41lm/W |
| LOR | | - | 44% |
| UGR | | - | <10 |




Beam angle
Spot 17°

Application



Weight
0,6Kg

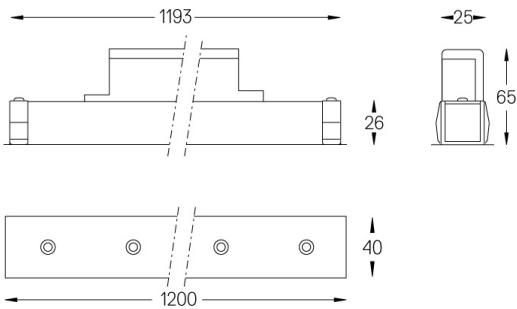

Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com