

Design: O/M

Module with opal diffuser and LED light source with good colour consistency and long operation lifespan.


Available in white (.01) and black (.02)


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP20 | 48Vdc



|   |              |           |
|---|--------------|-----------|
|  3000K | Light Source | Luminaire |
| Power   | 14W          | 17,1W     |
| Flux  | 2440lm       | 1140lm    |
| Efficiency  | 174lm/W      | 67lm/W    |
| LOR   | -            | 47%       |
| UGR   | -            | <25       |




Beam angle

Diffuse

Application

Weight

-

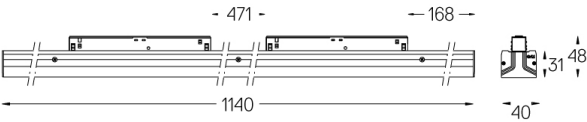

Finishes

○ .01 White / RAL 9010

Optional

70045 Modules removal tool

20x75mm

Data according to regulations

2019/2020/EU supplemented by 2021/341 |2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C

Model Identifier 28004772