

14W / 880lm / 2700K / DALI / Medium 30° /
601mm

73020

Design: O/M + Bartenbach GmbH
Module with double focus lens and housing and
perforated cover plate made of aluminium with
textured-paint finish.
Available in white (.01) and black (.02)

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 48Vdc




| LED | 2700K | Light Source | Luminaire |
|------------|--------|--------------|-----------|
| Power | 14W | | 17,1W |
| Flux | 1200lm | | 880lm |
| Efficiency | 86lm/W | | 51lm/W |
| LOR | - | | 73% |
| UGR | - | | <10 |



Beam angle
Medium 30°

Application

Weight
-

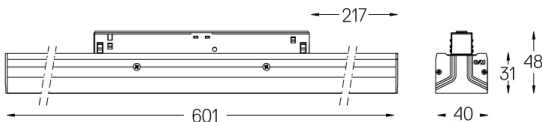

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

70045 Modules removal tool
20x75mm

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class F
Model Identifier 4053560342L