

56W / 3920lm / 3000K / DALI / Flood 50° /
1201mm

73063



Design: O/M + Bartenbach GmbH

Module with double focus lens and housing and
perforated cover plate made of aluminium with
textured-paint finish.

Available in white (.01) and black (.02)


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 48Vdc




LED	3000K	Light Source	Luminaire
Power		56W	65,9W
Flux		5160lm	3920lm
Efficiency		92lm/W	59lm/W
LOR		-	76%
UGR		-	<16




Beam angle
Flood 50°

Application



Weight

-

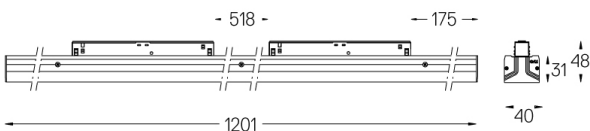

Finishes

○ .01 White / RAL 9010

● .02 Black / RAL 9005

Optional

70045 Modules removal tool

20x75mm

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class E
Model Identifier 4053560343H