

Sys inVision module

28W / 2580lm / 4000K / DALI / Flood 50° /
601mm

73087



Design: O/M + Bartenbach GmbH

Module with double focus lens and housing and perforated cover plate made of aluminium with textured-paint finish.


Available in white (.01) and black (.02)


LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 48Vdc




 LED	4000K	Light Source	Luminaire
Power	28W		34,1W
Flux	3400lm		2580lm
Efficiency	121lm/W		76lm/W
LOR	-		76%
UGR	-		<16




Beam angle
Flood 50°

Application



Weight

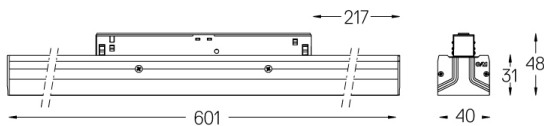

Finishes

○ .01 White / RAL 9010

● .02 Black / RAL 9005

Optional

70045 Modules removal tool

20x75mm

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class D
Model Identifier 4053560345H