

Design: O/M + Bartenbach GmbH
Module with LED light source and asymmetrical
aluminium reflector.
Available in white (.01) and black (.02)

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / power supply included.
IP20 | 48Vdc



| LED | 2700K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 7,6W | 9,5W |
| Flux | | 800lm | 370lm |
| Efficiency | | 105lm/W | 39lm/W |
| LOR | | - | 46% |
| UGR | | - | - |




Beam angle
Wallwasher

Application



Weight
-

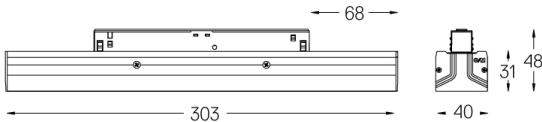

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

70045 Modules removal tool
20x75mm

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class F
Model Identifier 2053460024