

Design: O/M + Bartenbach GmbH
Module with LED light source and asymmetrical
aluminium reflector.
Available in white (.01) and black (.02)

LED CRI>80 / >50.000h, L80/B10
2-step MacAdam / power supply included.
IP20 | 48Vdc



LED	4000K	Light Source	Luminaire
Power		7,6W	9,5W
Flux		1120lm	510lm
Efficiency		147lm/W	54lm/W
LOR		-	46%
UGR		-	-




Beam angle
Wallwasher

Application



Weight
-

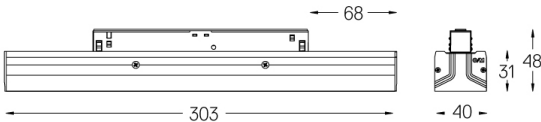

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

70045 Modules removal tool
20x75mm

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class D
Model Identifier 2053460026