

5W / 514lm / 3000K / DALI / Flood 65° /  
329mm

75017

Module with linear extruded lenses (Lightstream)  
combined with a secondary reflector, integrated into  
an extruded aluminium profile.  
Available in white (.04) and black (.05)

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 48Vdc




LED	3000K	Light Source	Luminaire
Power		5W	6,4W
Flux		640lm	514lm
Efficiency		128lm/W	80lm/W
LOR		-	80%
UGR		-	<16



Beam angle  
Flood 65°

Application

Weight  
-

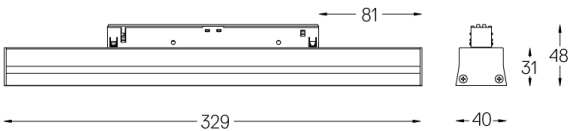

- Finishes
- .04 Matt White
  - .05 Matt Black

Optional  
70045 Modules removal tool  
20x75mm

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class E  
Model Identifier 2053560160M