


Module with linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.
Available in white (.04) and black (.05)

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 48Vdc




| | | |
|---|--------------|-----------|
|  3000K | Light Source | Luminaire |
| Power | 6,6W | 8,3W |
| Flux | 840lm | 680lm |
| Efficiency | 127lm/W | 82lm/W |
| LOR | - | 81% |
| UGR | - | <19 |



Beam angle
Wide flood 80°

Application

Weight
-

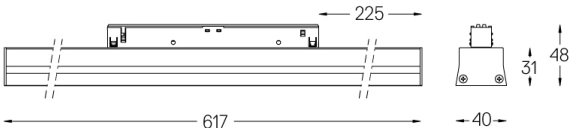

- Finishes
- ☐ .04 Matt White
 - ☒ .05 Matt Black

Optional
70045 Modules removal tool
20x75mm

Data according to regulations
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class E
Model Identifier 2053560160L