

Sys inFinit module


12W / 1310lm / 4000K / DALI / Wide flood 80°
/ 617mm


75055

Module with linear extruded lenses (Lightstream)
combined with a secondary reflector, integrated into
an extruded aluminium profile.
Available in white (.04) and black (.05)

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 48Vdc




 LED	4000K	Light Source	Luminaire
Power		12W	15W
Flux		1630lm	1310lm
Efficiency		141lm/W	90lm/W
LOR		-	80%
UGR		-	<19




Beam angle
Wide flood 80°

Application



Weight

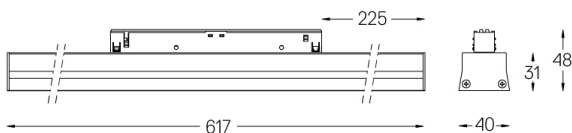

Finishes

- ☐ .04 Matt White
☒ .05 Matt Black

Optional

70045 Modules removal tool
20x75mm

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class D
Model Identifier 4053560084