


Image not found or type unknown

	High Output 2700K	Light Source	Luminaire
Power		29,5W	33W
Flux		4200lm	2003lm
Efficiency		142lm/W	61lm/W
LOR		-	48%
UGR		-	<25

Wall-mounted luminaire with housing made of anodised aluminium profile with matt or textured-paint finish. Recessed frosted polycarbonate diffuser with user friendly clipping system. 5mm aluminium end caps. Luminaire with high protection rating. Supplied with fitting accessories.

LED CRI>90 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP54 | 230Vac | 50/60Hz




Beam angle

-

Application



Weight

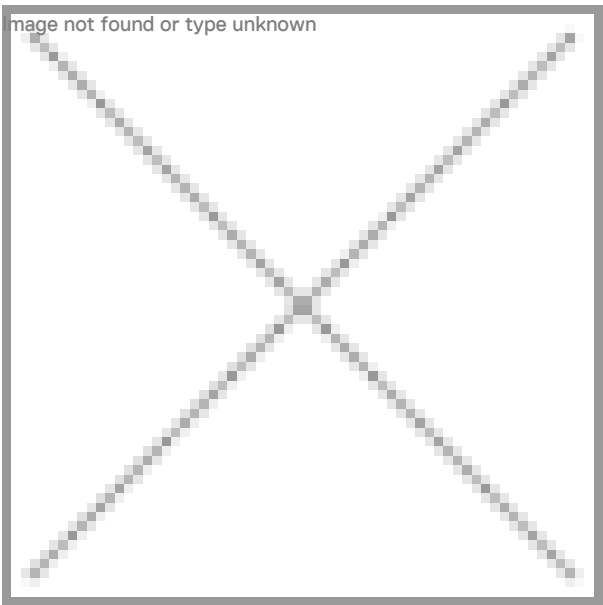

Finishes

- ☐ .01 White / RAL 9010
- ☒ .02 Black / RAL 9005
- ☐ .10 Anodised aluminium
- ☐ .00 RAL on request