

Image not found or type unknown

 <b>High Output 3000K</b>	<b>Light Source</b>	<b>Luminaire</b>
<b>Power</b>	29,5W	33W
<b>Flux</b>	4400lm	2099lm
<b>Efficiency</b>	149lm/W	64lm/W
<b>LOR</b>	-	48%
<b>UGR</b>	-	<25

Wall-mounted luminaire with housing made of anodised aluminium profile with matt or textured-paint finish. Recessed frosted polycarbonate diffuser with user friendly clipping system. 5mm aluminium end caps. Luminaire with high protection rating. Supplied with fitting accessories.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP54 | 230Vac | 50/60Hz




Beam angle

-

Application



Weight

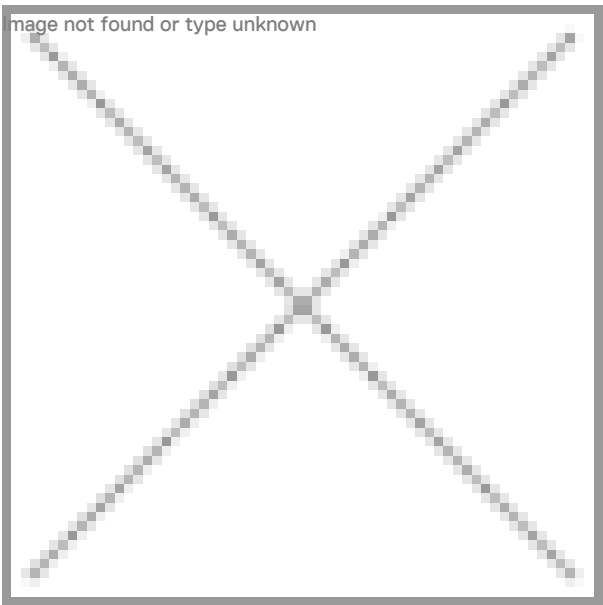

Finishes

- ☐ .01 White / RAL 9010
- ☒ .02 Black / RAL 9005
- ☐ .10 Anodised aluminium
- ☐ .00 RAL on request