

Design: O/M

Surface-mounted luminaire with tubular clear polycarbonate.

End caps in clear polycarbonate with marked installation angles.

Supplied with fitting accessories and 1m cable: H05RN-F3G 1mm<sup>2</sup>.

IP68 Connector supplied separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Equipped with DALI power supply.  
IP67 | IK08 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		9W	10W
Flux		1200lm	850lm
Efficiency		133lm/W	85lm/W
LOR		-	71%
UGR		-	<10

Beam angle  
Flood 36°

Application



Weight  
0,5Kg

mm


Finishes

.20 Clear

Optional

43431 IP68 Connector

5 poles

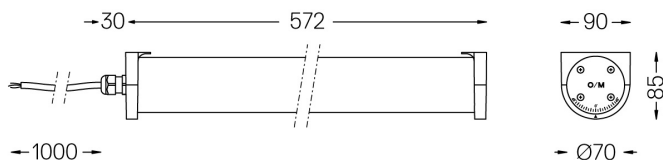

## Tube Evo

IP68 Connector 2 way

43431

1mm



Tube Evo IP68 Connector  
5 poles, Ø7 to Ø12mm

IP68

Weight  
0,04Kg

