

Design: O/M

Surface-mounted luminaire with tubular clear polycarbonate.

End caps in clear polycarbonate with marked installation angles.


Supplied with fitting accessories and 1m cable: H05RN-F3G 1mm².

IP68 Connector supplied separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Equipped with DALI power supply.
IP67 | IK08 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		27W	32W
Flux		3600lm	2550lm
Efficiency		133lm/W	85lm/W
LOR		-	71%
UGR		-	<10



Beam angle
Flood 36°

Application



Weight
1,4Kg

mm


Finishes

● .20 Clear

Optional

43431 IP68 Connector

5 poles

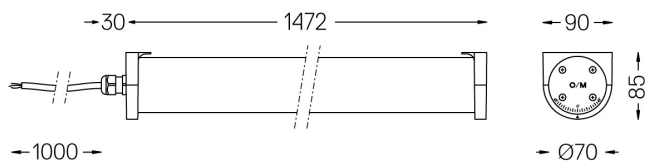

Tube Evo

IP68 Connector 2 way

43431



Tube Evo IP68 Connector
5 poles, Ø7 to Ø12mm

IP68

Weight
0,04Kg

