


Design: O/M + Bartenbach GmbH

Recessed luminaire with housing and perforated cover plate made of aluminium with textured-paint finish.


Aluminium end caps.

Easy recessing system with spring clips.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
700mA power supply included.
IP20 | 230Vac | 50/60Hz

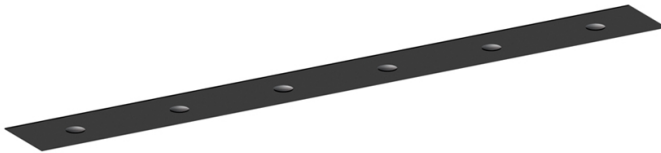

LED	4000K	Light Source	Luminaire
Power		13,5W	15W
Flux		1560lm	1190lm
Efficiency		116lm/W	79lm/W
LOR		-	76%
UGR		-	<19



Beam angle
Wide flood 50°

Application



Weight

mm

26x293

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

