



Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.


Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

**2700K**

**Light Source** **Luminaire**

<b>Power</b>	<b>2,2W</b>	<b>2,8W</b>
<b>Flux</b>	<b>200lm</b>	<b>145lm</b>
<b>Efficiency</b>	<b>91lm/W</b>	<b>51lm/W</b>
<b>LOR</b>	-	<b>73%</b>
<b>UGR</b>	-	<b>&lt;10</b>



**Beam angle**  
**Medium 31°**



**Weight**  
**0,15Kg**


**mm**

**26x26**

**Finishes**

- .01 White / RAL 9010**
- .02 Black / RAL 9005**

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

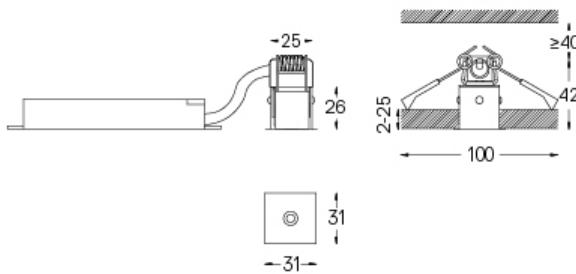

**Data according to regulations**

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier 4053560267H