

3,4W / 245lm / 3000K / On/Off / Flood 52° /
150mm

60060



Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.

Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

LED 3000K

Light Source Luminaire


Power 3,4W 4,4W

Flux 323lm 245lm

Efficiency 95lm/W 56lm/W

LOR - 76%

UGR - <13



Beam angle
Flood 52°



Weight
0,22Kg


mm

26x144

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

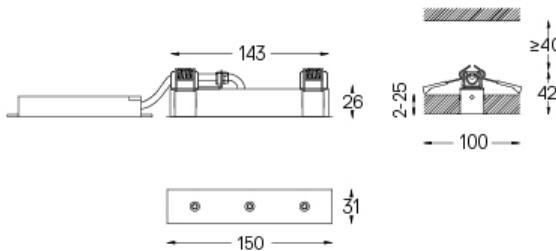

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class F
Model Identifier 4053560263L