



**9,8W / 1220lm / 4000K / On/Off / Flood 56°
/ ø85mm**

60167

Design: O/M + Bartenbach GmbH

Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.

Lightcore optics for defined and perfectly controlled beam of light.

Easy recessing system with spring clips.


Fitting accessories for different applications are available.


LED CRI>80 / >50.000h, L80/B10

2-step MacAdam / Power supply included.

IP20 | 230Vac | 50/60Hz



 LED	4000K	Light Source	Luminaire
Power	9,8W		12,3W
Flux	1360lm		1220lm
Efficiency	139lm/W		100lm/W
LOR	-		90%
UGR	-		<19



Beam angle
Flood 56°


Application



Weight
0,53Kg



078 (trim version)

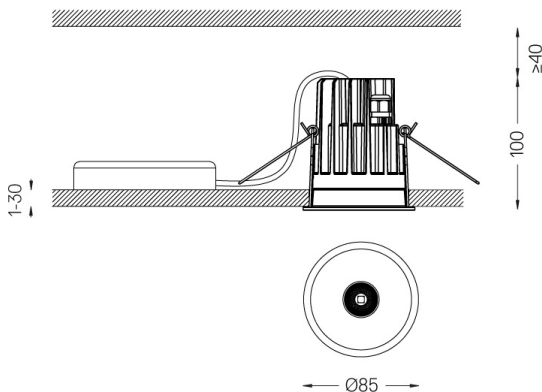

Finishes

- ☐ .01 White / RAL 9010
☒ .02 Black / RAL 9005

Optional

59014 Accessory 12,5mm ceilings (flush installation)
150x91x20mm

59038 Accessory 10-40mm ceilings (acoustic ceiling)
156x100x78mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class F
Model Identifier 2053560247H