One

4,5W / 560lm / 4000K / DALI / Flood 56° / ø85mm

60174

Design: O/M + Bartenbach GmbH
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
Lightcore optics for defined and perfectly controlled beam of light.
Easy recessing system with spring clips.
Fitting accessories for different applications are available.

LED CRI>80 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz

LED 4000K	Light Source	Luminaire
Power	**4,5W**	**5,8W**
Flux	**620lm**	**560lm**
Efficiency	**138lm/W**	**97lm/W**
LOR	**-**	**90%**
UGR	**-**	**<16**



Beam angle
Flood 56°

Application

Weight
0,53Kg

mm

Ø78 (trim version)

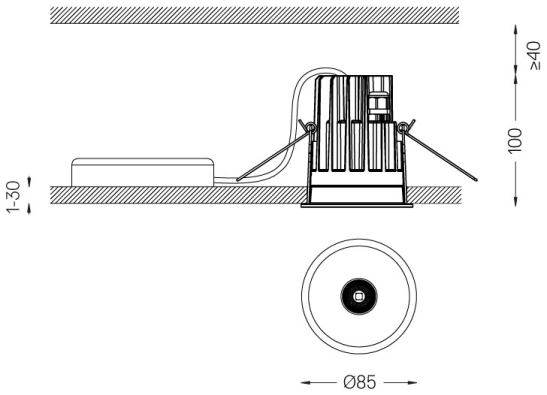

Finishes

○ **.01** White / RAL 9010
● **.02** Black / RAL 9005

Optional
59014 Accessory 12,5mm ceilings (flush installation)
150x91x20mm
59038 Accessory 10-40mm ceilings (acoustic ceiling)
156x100x78mm

For the specific supply of "DALI 2" drivers, please contact: support@om-light.com
The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations
2019/2020/EU supplemented by 2021/341 |2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class E
Model Identifier 2053560247L

www.om-light.com / mail@om-light.com Rua Maurício Lourenço Oliveira 186, 4405-034 Vila Nova de Gaia, Porto. Portugal. / Apartado 1538 4401-901 Vila Nova de Gaia, Porto Portugal / tel. +351 223 710 419