

4,5W / 380lm / 3000K / On/Off / Medium  
40° / ø86x210

60252




Design: O/M + Bartenbach GmbH  
Surface-mounted spotlight with die-cast aluminium body with electrostatic 100% polyester paint finish. Reflector built based on micro surfaces with complex geometry coated with aluminium alloy, creating a high-gloss, entirely mirrored surface. Accurate reflector for a defined and controlled beam of light, achieving the maximum efficiency. Orientable by 90° horizontal rotation and 330° vertical rotation. Power supply incorporated.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz




LED	3000K	Light Source	Luminaire
Power		4,5W	5,3W
Flux		520lm	380lm
Efficiency		116lm/W	72lm/W
LOR		-	73%
UGR		-	-



Beam angle  
Medium 40°

Application

Weight  
0,64Kg

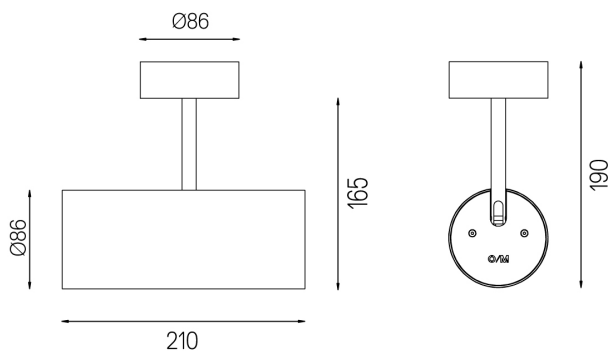

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005