

9,8W / 770lm / 3000K / On/Off / Medium 41°  
/ ø85mm

60277




Design: O/M + Bartenbach GmbH  
 Track-mounted spotlight with die-cast aluminium body with electrostatic 100% polyester paint finish. Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam. Orientable by 90° horizontal rotation and 330° vertical rotation. Driver included.

LED CRI>90 / >50.000h, L80/B10  
 2-step MacAdam / Driver included.  
 IP20 | 230Vac | 50/60Hz



**3000K**

	<b>Light Source</b>	<b>Luminaire</b>
<b>Power</b>	<b>9,8W</b>	<b>12,3W</b>
<b>Flux</b>	<b>1035lm</b>	<b>770lm</b>
<b>Efficiency</b>	<b>106lm/W</b>	<b>63lm/W</b>
<b>LOR</b>	-	<b>74%</b>
<b>Operating Condition</b>	-	<b>230Vac</b>




**Beam angle**  
**Medium 41°**

**Application**

**Weight**  
**0,64Kg**

mm

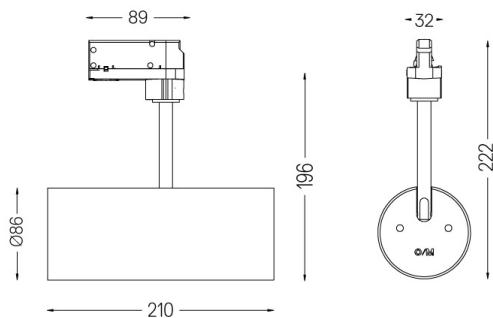

**Finishes**

- .01** White / RAL 9010
- .02** Black / RAL 9005

**Data according to regulations**

2019/2020/EU supplemented by 2021/341 |2019/2015/EU  
 supplemented by 2021/340/EU Energy Consumption Labelling  
 Ordinance. This product contains a light source of efficiency class F  
 Model Identifier 2053560257H