

10W / 990lm / 4000K / DALI / Medium 28° /
ø45mm

60303



Design: O/M

Recessed adjustable spotlight with aluminium body.

The spotlight can be rotated up to 90° horizontally and 330° vertically.

Easy recessing system with spring clips.

Accessories available separately and easily applicable after installation.

LED CRI>80 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



4000K

Light Source

Luminaire


Power 10W 12,5W

Flux 1360lm 990lm

Efficiency 136lm/W 79lm/W

LOR - 73%

UGR - <16



Beam angle
Medium 28°




Weight
0,6Kg

194x26 mm

194x26

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

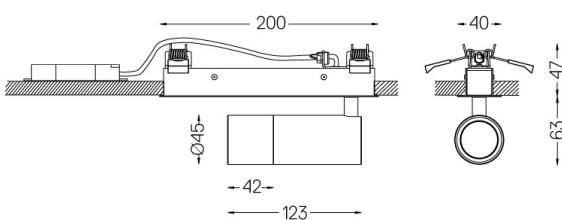

Optional

- 59016 Elliptical refractor Ø39x0,5mm
- 59017 Soft diffuser Ø39x0,5mm
- 59018 Louvre Ø39x3mm
- 59019 Snoot 72mm Ø45x72

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class F
Model Identifier 2053560247H