

Beam

**10W / 1150lm / 4000K / DALI / Flood 46° /
ø100mm**

60388




Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing accessory for flush version supplied separately.

LED CRI>80 / >50.000h, L80/B10
3-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



 LED	4000K	Light Source	Luminaire
Power		10W	12,5W
Flux		1450lm	1150lm
Efficiency		145lm/W	92lm/W
LOR		-	79%
UGR		-	<22



Beam angle
Flood 46°


Application



Weight
0,5Kg



Ø95 (trim version)

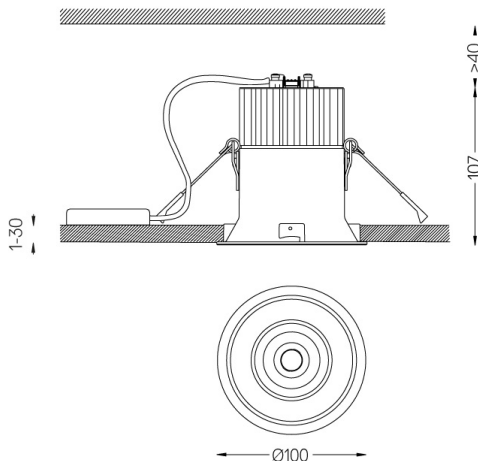

Finishes

- .04 Matt White
● .05 Matt Black

Optional

59066 Flush accessory (12.5mm ceilings)
201x17mm

59067 Flush accessory (15mm ceilings)
201x19,5mm

59068 Flush accessory (25mm ceilings)
201x29,5mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class E
Model Identifier BXRC-40E2000-C-73