

19W / 1620lm / 4000K / On/Off / Diffuse /  
ø100

60463



Design: O/M

Ceiling-recessed luminaire made of aluminium die-cast.


Recessing system with spring clips.

Recessing accessory for trimless version supplied separately.

LED CRI>80 / >50.000h, L80/B10  
2-step MacAdam / 500mA power supply included  
IP54 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power	19W	23W	
Flux	2740lm	1620lm	
Efficiency	144lm/W	70lm/W	
LOR	-	59%	
UGR	-	<28	

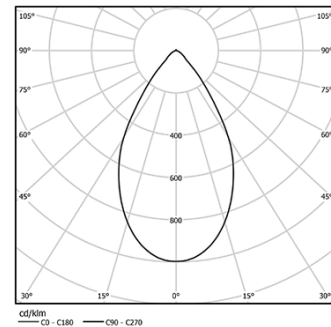

Beam angle  
Diffuse


Application



Weight  
0,5Kg

mm

ø95 (trim version)

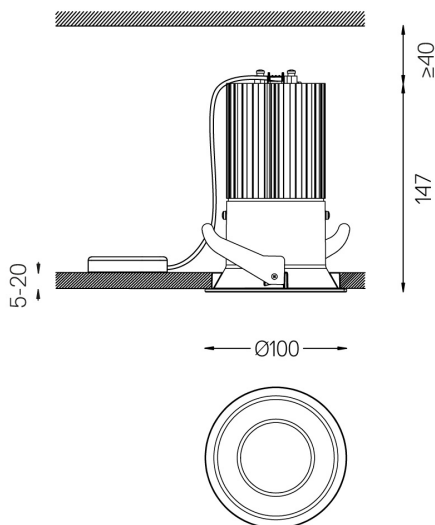

Finishes

- .04
- .05

Ordered separately

59021 Accessory for flush installation

160x107x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

Accessory for flush  
installation

59021

Beam Ø100 accessory for flush  
installation in false ceilings  
For 12.5mm ceilings.



Weight  
0.03Kg

Finishes  
.99

1mm

Ø110

