

inFinit Pendant direct/indirect

17+35W / 1800+1700lm / 4000K / DALI /
Flood 64° / batwing / 1480mm

60540

Product timing available by request



Design: OM + Bartenbach GmbH
Pendant direct and indirect luminaire with housing made of aluminium in matte finish.
Aluminium anodised end caps with matt finish.
Linear lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.
Indirect light: Lenses for batwing effect protected by a transparent polycarbonate diffuser.
Fitting accessories ordered separately.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



| LED | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-------------|
| Power | | 17+35W | 20+40W |
| Flux | | 2250+2150lm | 1800+1700lm |
| Efficiency | | 85lm/W | 57lm/W |
| LOR | | - | 80% |
| UGR | | - | <13 |




Beam angle
Flood 64° /
batwing

Application



Weight
5,2Kg

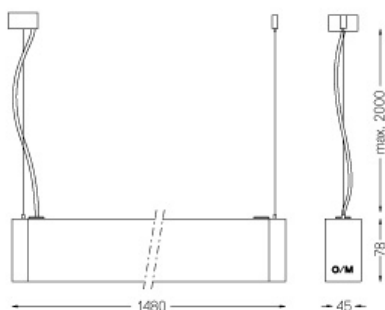

Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

59054 Pendant direct/indirect fitting accessory
56051 Clear Base DALI
ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com