


26W / 2580lm / 4000K / On/Off / Flood 52°
/ 611mm

60685

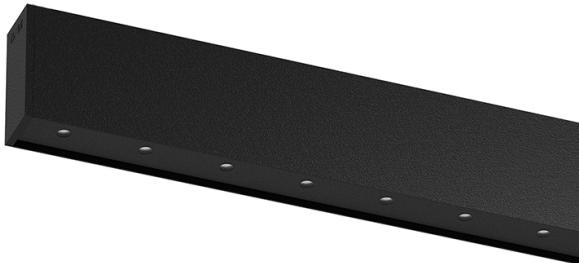

Design: O/M + Bartenbach GmbH
Surface or pendant luminaire with housing made of aluminium with electrostatic 100% polyester paint with textured finish.

Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured-finish.

Housing and perforated cover plate made of aluminium with textured-paint finish. With the latest Bartenbach GmbH technology, inVision35 is a discreet solution, that can use great light distribution and visual comfort from a nearly invisible source.

Fitting accessories for pendant version ordered separately.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



4000K

Light Source

Luminaire


Power **26W** **31,7W**

Flux **3400lm** **2580lm**

Efficiency **131lm/W** **81lm/W**

LOR **-** **76%**

UGR **-** **<16**



Beam angle
Flood 52°

Application



Weight
1,2Kg

mm

Finishes

- .01 White / RAL 9010**
- .02 Black / RAL 9005**

Mandatory

- 54036 Pendant direct fitting accessory**
- 54034 Clear Base**
ø60x35mm

