


46W* / 2720lm* / 2200K-5000K / DALI /
Medium 31° / 1211mm

60704

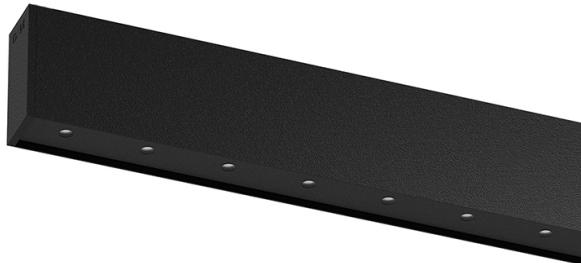

Design: O/M + Bartenbach GmbH
Surface or pendant luminaire with housing made of aluminium with electrostatic 100% polyester paint with textured finish.

Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured-finish.

Housing and perforated cover plate made of aluminium with textured-paint finish. With the latest Bartenbach GmbH technology, inVision35 is a discreet solution, that can use great light distribution and visual comfort from a nearly invisible source.

Fitting accessories for pendant version ordered separately.

LED >80CRI<90 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
DALI DT8.
IP20 | 230Vac | 50/60Hz





2200K-5000K

Light Source

Luminaire

Power	46W*	58W*
Flux	3760lm*	2720lm*
Efficiency	82lm/W	47lm/W
LOR	-	72%
UGR	-	<10

Beam angle
Medium 31°



Weight
2,4Kg

Application

Weight

2,4Kg

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

- 54036 Pendant direct fitting accessory
- 56051 Clear Base DALI
- ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

