


46W\* / 2840lm\* / 2200K-5000K / DALI /  
Flood 52° / 1211mm

60705

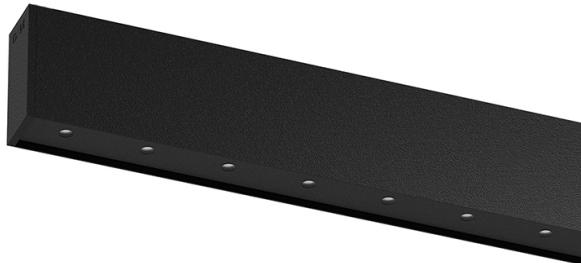


Design: O/M + Bartenbach GmbH  
Surface or pendant luminaire with housing made of aluminium with electrostatic 100% polyester paint with textured finish.

Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured-finish.

Housing and perforated cover plate made of aluminium with textured-paint finish. With the latest Bartenbach GmbH technology, inVision35 is a discreet solution, that can use great light distribution and visual comfort from a nearly invisible source.

Fitting accessories for pendant version ordered separately.

LED >80CRI<90 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
DALI DT8.  
IP20 | 230Vac | 50/60Hz



Beam angle  
Flood 52°



Weight  
2,4Kg

LED	2200K-5000K	Light Source	Luminaire
Power	46W*	58W*	
Flux	3760lm*	2840lm*	
Efficiency	82lm/W	49lm/W	
LOR	-	76%	
UGR	-	<16	

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

- 54036 Pendant direct fitting accessory
- 56051 Clear Base DALI  
ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

