

14W / 1360lm / 3000K / DALI / Wide flood  
80° / 1152mm


61205

Compatibility with other modules must be confirmed  
with support@om-light.com


Design: OM + Bartenbach  
GmbH

Module with linear extruded lenses (Lightstream)  
combined with a secondary reflector, integrated into  
an extruded aluminium profile.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

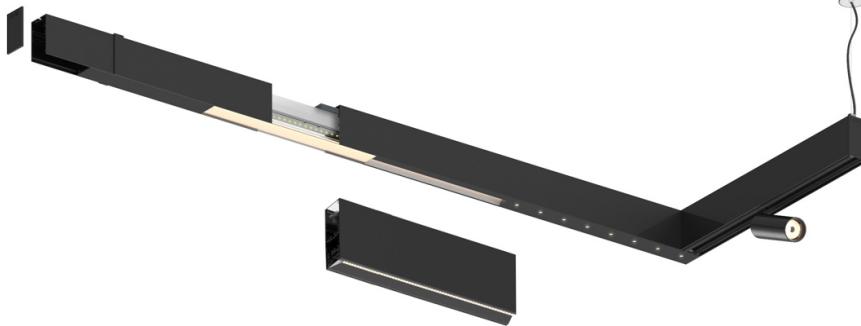

LED	3000K	Light Source	Luminaire
Power	14W	16W	
Flux	1680lm	1360lm	
Efficiency	127lm/W	87lm/W	
LOR	-	0.8100000000000001	
UGR	-	<19	



Application

Weight

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to  
model the right lighting functions for different tasks. For further  
information please contact: support@om-light.com

