

14W / 1440lm / 4000K / DALI / Flood 65° /
1152mm


61223

Compatibility with other modules must be confirmed
with support@om-light.com

Design: OM + Bartenbach
GmbH

Module with linear extruded lenses (Lightstream)
combined with a secondary reflector, integrated into
an extruded aluminium profile.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

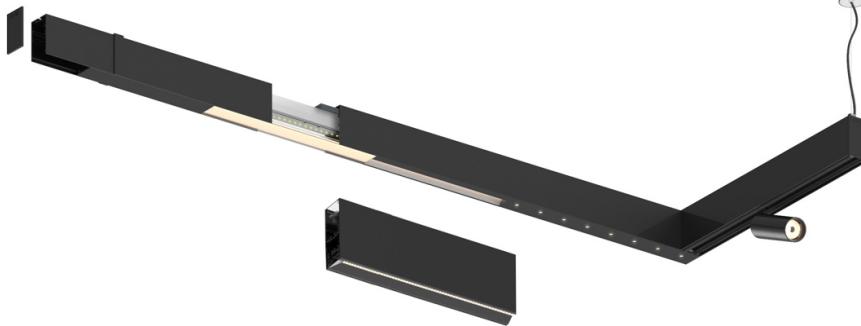

4000K

Light Source

Luminaire

Power

14W

16W

Flux

1800lm

1440lm

Efficiency

136lm/W

92lm/W

LOR

-

0.8

UGR


-

<13

Beam angle
Flood 65°

Application

Weight



mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to
model the right lighting functions for different tasks. For further
information please contact: support@om-light.com

