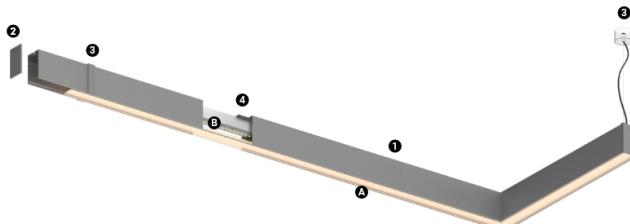


20W / 1680lm / 2700K / DALI / Diffuse /  
839mm

61325



| Structure             | Diffuser              |
|-----------------------|-----------------------|
| 1 Profile             | A Polycarbonate frost |
| 2 End caps            | diffuser              |
| 3 Fitting accessories |                       |
| 4 Profile coupling    | B LED Modules         |


Design: O/M

LED light source with good colour consistency and long operation lifespan.


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

LED 2700K

| Light Source | Luminaire |
|--------------|-----------|
| 20W          | 24,4W     |
| 3585lm       | 1680lm    |
| 179lm/W      | 69lm/W    |
| -            | 47%       |
| -            | <25       |

Beam angle  
Diffuse

Application

Weight  
0,51Kg

mm

Finishes

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
and D

Model Identifier 89603210, 89603215

