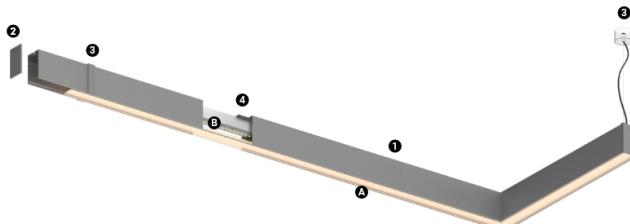


41W / 3360lm / 2700K / DALI / Diffuse /
1679mm

61331



Structure	Diffuser
1 Profile	A Polycarbonate frost
2 End caps	diffuser
3 Fitting accessories	
4 Profile coupling	B LED Modules


Design: O/M

LED light source with good colour consistency and long operation lifespan.


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

LED 2700K

	Light Source	Luminaire
Power	41W	48,2W
Flux	7170lm	3360lm
Efficiency	175lm/W	70lm/W
LOR	-	47%
UGR	-	<25

Beam angle
Diffuse

Application

Weight
0,6Kg

mm

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class D
Model Identifier 89603215