


8,9W / 753,75lm / 3000K / On/Off / Diffuse
/ 629mm

61336

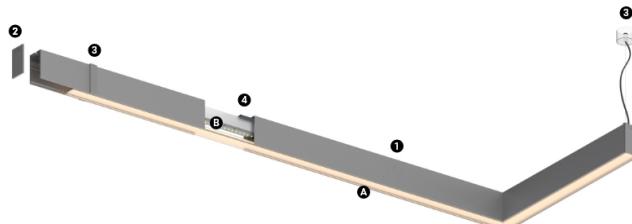

Structure	Diffuser
1 Profile	A Polycarbonate frost
2 End caps	diffuser
3 Fitting accessories	
4 Profile coupling	B LED Modules

Design: O/M
LED light source with good colour consistency and long operation lifespan.


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



LED 3000K


Light Source Luminaire

Power	8,9W	11,1W
Flux	1608,75lm	753,75lm
Efficiency	181lm/W	68lm/W
LOR	-	47%
UGR	-	<25



Beam angle
Diffuse

Application



Weight
0,5Kg

mm

Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
Model Identifier 89603203, 89603216

