


17W / 1437,5lm / 3000K / On/Off / Diffuse /  
699mm

61339

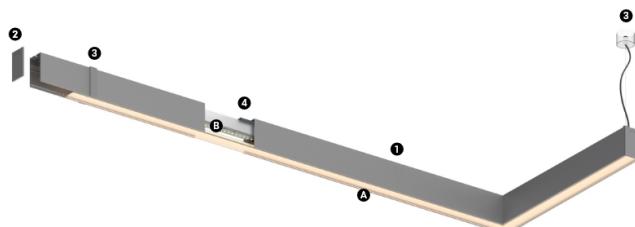

#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

#### Diffuser

- A Polycarbonate frost diffuser

#### Light Source

- B LED Modules

Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz




3000K

#### Light Source


#### Luminaire

Power	17W	20,7W
Flux	3062,5lm	1437,5lm
Efficiency	180lm/W	69lm/W
LOR	-	47%
UGR	-	<25



Beam angle  
Diffuse

#### Application



Weight  
0,5Kg

mm

#### Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

#### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
Model Identifier 89603206, 89603216

