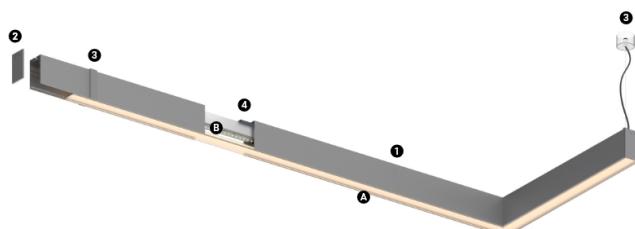


9,9W / 890lm / 4000K / On/Off / Diffuse /  
699mm

61370



## Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

## Diffuser

- A Polycarbonate frost diffuser

## Light Source



- B LED Modules

Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz
**4000K**
**Light Source** **Luminaire**

<b>Power</b>	<b>9,9W</b>	<b>12,4W</b>
<b>Flux</b>	<b>1890lm</b>	<b>890lm</b>
<b>Efficiency</b>	<b>191lm/W</b>	<b>72lm/W</b>
<b>LOR</b>	<b>-</b>	<b>47%</b>
<b>UGR</b>	<b>-</b>	<b>&lt;25</b>


**Beam angle**  
**Diffuse**
**Application**
**Weight**  
**0,5Kg**
**Finishes**

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

**Data according to regulations**

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
Model Identifier 89603207, 89603217

