


17W / 1525lm / 4000K / DALI / Diffuse /  
699mm

61387

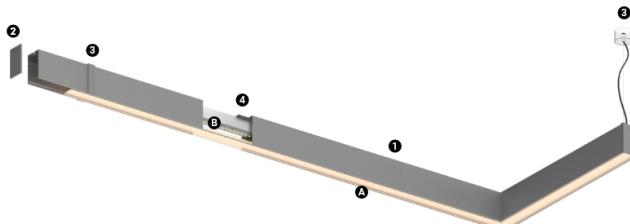

Structure	Diffuser
1 Profile	A Polycarbonate frost
2 End caps	diffuser
3 Fitting accessories	
4 Profile coupling	B LED Modules

Design: O/M  
LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz




LED 4000K

## Light Source


## Luminaire

Power	17W	20,7W
Flux	3250lm	1525lm
Efficiency	191lm/W	74lm/W
LOR	-	47%
UGR	-	<25



Beam angle  
Diffuse

## Application



Weight  
0,5Kg

## Finishes

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com  
Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

## Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
Model Identifier 89603207, 89603217

