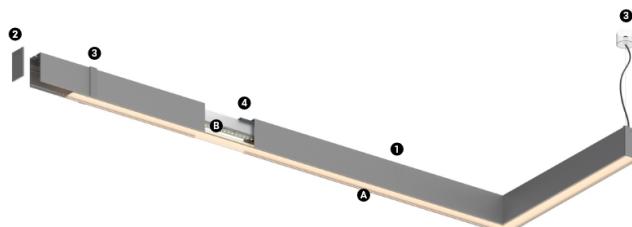


41W / 3660lm / 4000K / DALI + E-KIT /  
Diffuse / 1679mm

61397



Structure	Diffuser
1 Profile	A Polycarbonate frost
2 End caps	diffuser
3 Fitting accessories	
4 Profile coupling	B LED Modules

Design: O/M

LED light source with good colour consistency and  
long operation lifespan.LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

LED 4000K

Light Source Luminaire


Power 41W 48,2W

Flux 7800lm 3660lm


Efficiency 190lm/W 76lm/W

LOR - 47%

UGR - &lt;25

Beam angle  
Diffuse

Application

Weight  
0,8Kg

mm

Finishes

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
Model Identifier 89603217