


38W / 2800lm / 3000K / DALI / Diffuse /  
1143mm

62136

Design: O/M  
LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

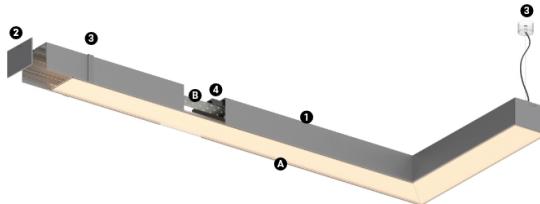

**Structure**  
1 Profile  
2 End caps  
3 Fitting accessories  
4 Profile coupling

**Diffuser**  
A Polycarbonate frost diffuser  
**Light Source**  
B LED Modules

LED 3000K

Light Source

Luminaire

Power

38W

34,1W

Flux

4520lm

2800lm

Efficiency

161lm/W


82lm/W

LOR

62%


UGR

&lt;25



**Beam angle**  
**Diffuse**

Application



**Weight**  
0,57Kg

Finishes

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class D  
Model Identifier WU-M-536-S-BC-830

