

32+18W / 2840+1480lm / 4000K / DALI /  
Diffuse / batwing / 2271mm

62212



Design: O/M

Pendant direct and indirect light luminaire with housing made of anodised aluminium profile with textured paint finish. Frosted diffuser for direct light and clear diffuser for indirect light with user friendly clipping system. 5mm aluminium end caps.

Separate Circuits.


Suspension accessories available separately. Supply base made of aluminium, clear power cable (3x0,75mm<sup>2</sup>) and steel suspension cables (1,5mm) with millimetric height adjustment system.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.


IP20 | 230Vac | 50/60Hz



	4000K	Light Source	Luminaire
Power	32+18W	39+20,7W	
Flux	6040+2360lm	2840+1480lm	
Efficiency	168lm/W	72lm/W	
LOR	-	51%	
UGR	-	<22	




Beam angle  
Diffuse / batwing



Weight  
7,9Kg

mm

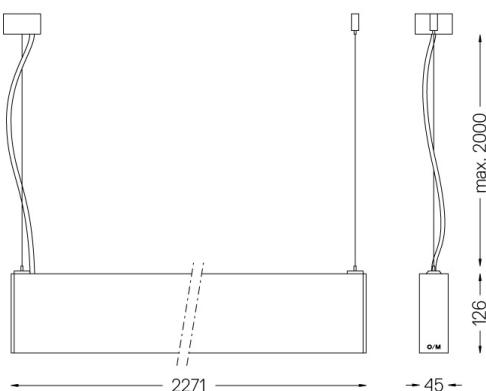

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium

Mandatory

56053 Pendant direct/indirect fitting accessory  
56051 Clear base DALI  
Ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
and E

Model Identifier WU-M-594-840, 89603217