

27+20W / 2300+1380lm / 3000K / DALI /  
Diffuse / batwing / 1119mm

62311

Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

#### Diffuser

A Polycarbonate frost diffuser

#### Light Source

B LED Modules

LED	3000K	Light Source	Luminaire
Power		27+20W	32,9+24,4W
Flux		4900+2200lm	2300+1380lm
Efficiency		151lm/W	64lm/W
LOR		-	52%
UGR		-	<25




Beam angle  
Diffuse / batwing

Application



Weight  
0,58Kg

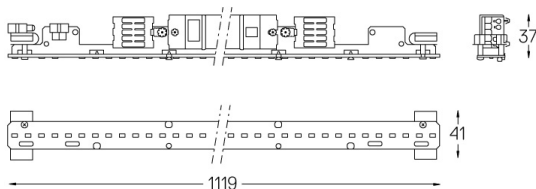

#### Finishes

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

#### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C and E

Model Identifier WU-M-594-830, 89603216