
O/M



Light Source

B LED Modules

3 Fitting accessories

4 Profile coupling

H45 Made-to-measure

34+20W / 2875+1380lm / 3000K / DALI / Diffuse / batwing / 1399mm

62313


Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam Power supply included. IP20 | 230Vac | 50/60Hz



	Light Source	Luminaire
Power	34+20W	40+24,4W
Flux	6125+2200lm	2875+1380lm
Efficiency	154lm/W	66lm/W
LOR	-	51%
UGR	-	<25

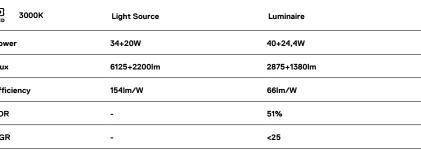

Beam angle Diffuse / batwing

Application



Weight 0,6Kg

Finishes

For the specific supply of "DALI 2" drivers, please contact: support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 |2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C and E

Model Identifier 89603211, 89603216, WU-M-594-830



