


24+13W / 2010+1050lm / 3000K / DALI /
Diffuse / batwing / 1679mm

62314

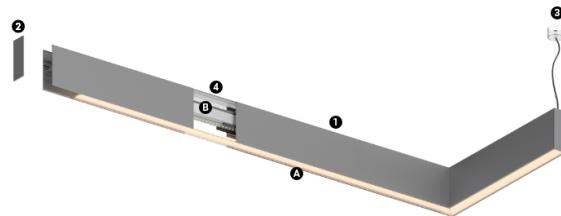

Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Diffuser

- A Polycarbonate frost diffuser

Light Source

- B LED Modules


Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

LED 3000K
mm

	Light Source	Luminaire
Power	24+13W	29,3+15,9W
Flux	4290+1650lm	2010+1050lm
Efficiency	157lm/W	65lm/W
LOR	-	51%
UGR	-	<22

Beam angle
Diffuse / batwing

Application

Weight
0,8Kg

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
and E

Model Identifier WU-M-594-830, 89603216

